

PUSH BUTTON VERSION

BUSBAR SPLIT CORE CURRENT TRANSFORMERS

SECONDARY 1A / 5A

MEASUREMENT RANGE 125A - 1000A.

Sliders for centering the conductor.

Support brackets included.

Available with 1A/5A secondary as standard.

**COMMON FEATURES**

Material: UNE21031 Self extinguishing VO

Thermal class B (130°C)

Storage temperature: -40°C... +85°C

Humidity: 15%...85% not condensing

Working frequency: 50/60Hz

Insulation category: 3kV

Short time thermal current (I_{th}): 60 InMaximum current on the primary: 2,5 I_{th}

Testing voltage: 0,72kV c.a./a.c.

Standard: IEC/EN 61869-2


Connectors on the secondary : Dual M4 screws

Built-in Terminal covers

TP-32


Busbar window 20x30mm

Diameter 20mm

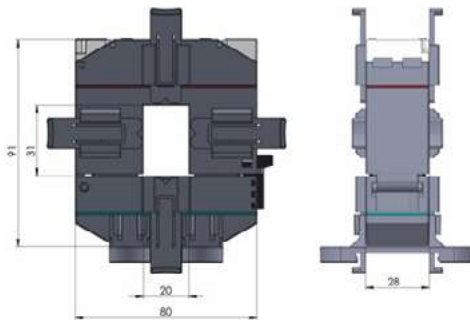**TP-68**

Busbar window 60x80mm

Diameter 60mm

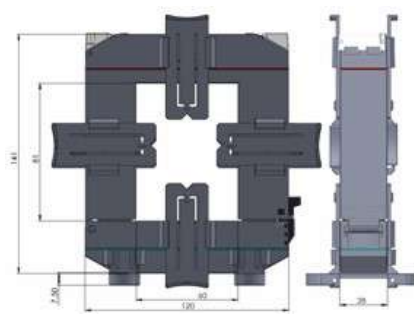

MODEL	Primary Current	Cl. 0,5 VA	Cl. 1 VA	Cl. 3 VA	Order Code
TP-32	125 A	-	-	1	TP-32-125/x
TP-32	200 A	-	-	2	TP-32-200/x
TP-32	300 A	0,5	1	2	TP-32-300/x
TP-32	400 A	0,5	2,5	4	TP-32-400/x
TP-68	300 A	-	1	2,5	TP-68-300/x
TP-68	400 A	1	1,5	3	TP-68-400/x
TP-68	500 A	2	5	7,5	TP-68-500/x
TP-68	600 A	2	5	8	TP-68-600/x
TP-68	800 A	3	6	10	TP-68-800/x
TP-68	1000 A	5	8	15	TP-68-1000/x